

NEW!

DAB DEFENDER

DAB
WATER • TECHNOLOGY

PREPARE. PROTECT. PREVAIL with the DAB Defender fire pump. This robust, reliable pump is a must have for any homeowner living in areas of high fire danger. Delivering high flow rates and extra strong water pressure the DAB Defender provides efficient water transfer for a range of applications including:

- Fire fighting
- Irrigation
- Boom spraying
- Tank filling

Complete with a roll cage for easy transportation, the DAB Defender is available in 2 versions, petrol and diesel. The petrol version is available with a genuine Honda GX 160 engine while the diesel version is available with a quality Lister K164 diesel engine.

PUMP FEATURES:

Roll cage

- Complete with roll cage as standard, allowing for easy transportation

Self priming

- Ideal for transferring water from above or below ground water sources

Three way discharge

- Allows for greater connection options

Water pressure

- Extra strong water pressure to optimise performance and efficiency

Hose kit option

- 2 x 6 m (¾") hoses with fire spray nozzles
- 1 x 4 m (1½") grey suction hose with strainer

ENGINE FEATURES:

Petrol version:

- Genuine quality Honda Australia GX 160 engine
- Oil Alert System to prevent engine damage caused by insufficient oil in the crankcase
- Built to Australian emission specifications

Diesel version

- Robust Australian Lister K164 engine
- Electric start for an easy start up
- Variable speed to help save energy consumption
- Designed for continuous operation in ambient temperatures up to 40°C - ideal for the harsh Australian climate
- 100 hour service intervals for low maintenance



WARRANTY



PUMP



**HONDA
PETROL ENGINE**



**LISTER
DIESEL ENGINE**

CONSTRUCTION:

Wet end materials


- Aluminium suction cover, diffuser, impeller, casing and 3 way discharge
- Carbon / ceramic mechanical seal
- Stainless steel casing bolts

DAB DEFENDER



PERFORMANCE GRAPH:

SINGLE IMPELLER

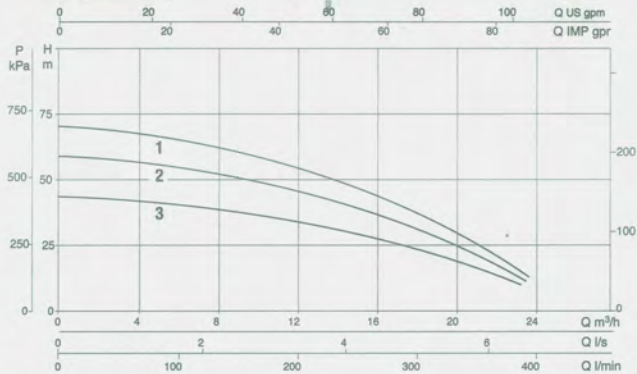

1. Intermittent - emergency only
2. Maximum performance at standard governor setting
3. Continuous - recommended max for extended service duty

TECHNICAL DATA:

Engine	Fuel Type	Start Type	Connections		Weight (kg)	Dimensions (mm)			RRP (incl. GST)
			Inlet	Outlet		L	H	W	
Honda GX160	Petrol	Recoil	1½" M	1 x 1½" 2 x 1" M	24	530	420	430	\$1,155.00
Lister K164	Diesel	Electric	1½" M	1 x 1½" 2 x 1" M	64	790	550	580	\$4,093.00

ACCESSORIES:

Accessory	Description	RRP (incl. GST)
FIRE HOSE KIT	2 x 6 m (¾") hoses with fire spray nozzles 1 x 4 m (1½") grey suction hose with strainer	\$330.00