

FEKA 300



The FEKA 300 submersible pump is ideal for fixed or portable vertical installations and suitable for pumping clean water containing soft solids up to 30 mm in diameter.

PUMP FEATURES:

Compact design

- Portable pump for lifting water from tanks and rivers or emptying swimming pools
- Vertical discharge makes the pump suitable for use in narrow pits

Protective functions

- Thermal overload protection
- Current overload protection
- Ability to operate when partially submerged

Complete package

- Supplied with a 10 metre long power cable with plug, self-sealing fitting and 4-step fitting



OPERATING CONDITIONS:

Liquid temperature

0°C to +35°C

Maximum immersion depth

7 metres

Maximum dry running time

1 minute

CONSTRUCTION:

Materials

- Technopolymer pump body, impeller, top body and suction grid
- Stainless steel motor and rotor shaft
- Triple o-ring seals interposed with grease chamber

Voltage

1 x 240 V, 50 Hz

Protection level


IP68

Insulation class

F

TECHNICAL DATA:

PERFORMANCE GRAPH:

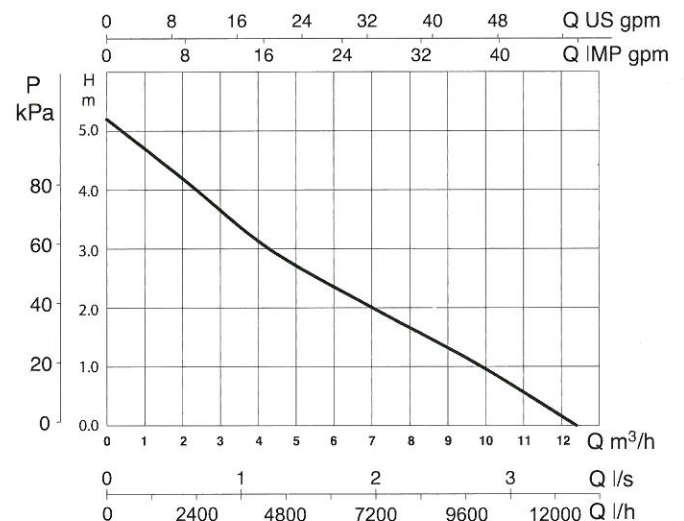

| Pump Model | P2 (kW) | 1 ph In (A) | Outlet | Weight (kg) | Dimensions (mm) | | Max Flow (l/min) | Flow Rates | | | RRP (incl. GST) |
|------------|---------|-------------|----------|-------------|-----------------|-------|------------------|------------|-------------------|------------|-----------------|
| | | | | | Height | Width | | l/min | m ³ /h | US/IMP gpm | |
| FEKA 300 | 0.22 | 1.5 | 1 1/4" M | 5.8 | 313 | 140 | 124 | 5.2 | 2.8 | 1.0 | \$317 |