



**Aldgate Pump**  
Sales & Service



*Protect your investment with a  
"Diesel Powered" Fire Fighting  
system that can be remote started  
via your "mobile phone"*



Aldgate Pump Sales & Service is proud to be associated with "Graham Lund" the West Australian designer and manufacturer of the SFS01-3G mobile phone controller that can reliably start and stop a diesel powered pumping system. Call James at Aldgate Pumps to discuss upgrading your petrol driven fire protection device to the latest diesel drive technology complete with the added safety of remote starting your fire protection system via a mobile phone.

## Specifications

All Colard Diesel models are speed governed at approx 3100 RPM.


At this speed the pump will not overload the engine under a variety of pumping conditions unless exceeding water flow rates.

The Diesel engine is made in China and imported to Australia where it is re-branded.

7 HP Colard Pumpset & Roll frame overall dimensions :  
Length 580mm, Width 470mm, Height 670mm

Model	Colard 7 HP (Diesel Engine only)
Type	Single-Cylinder, Vertical 4-Cycle, Air-cooled Diesel
Combustion System	Direct Injection
Displacement [cc(cu.in.)]	306 (18.68)
Bore x Stroke [mm (in.)]	78×64 (3.07×2.52)
Rated Speed [rpm]	Governed 3100
Power Take Off	Crankshaft
Starting System	Recoil or Recoil/Electric
Fuel Tank Capacity	12 Litres (Long Range Tank)
Lub. Oil Capacity	1.1 Litres
Fuel Consumption (approx)	260 - 285 grams/KWh = 1.564 Litres per hour
Dimension: L x W x H [mm(in.)]	383 (15.08) x 421(16.57) x 450(17.72)
Dry Weight(Recoil) [kg(lbs.)]	33 Kg (73)
Dry Weight(Electric) [kg(lbs.)]	38 Kg (84)

E: Electric Starter

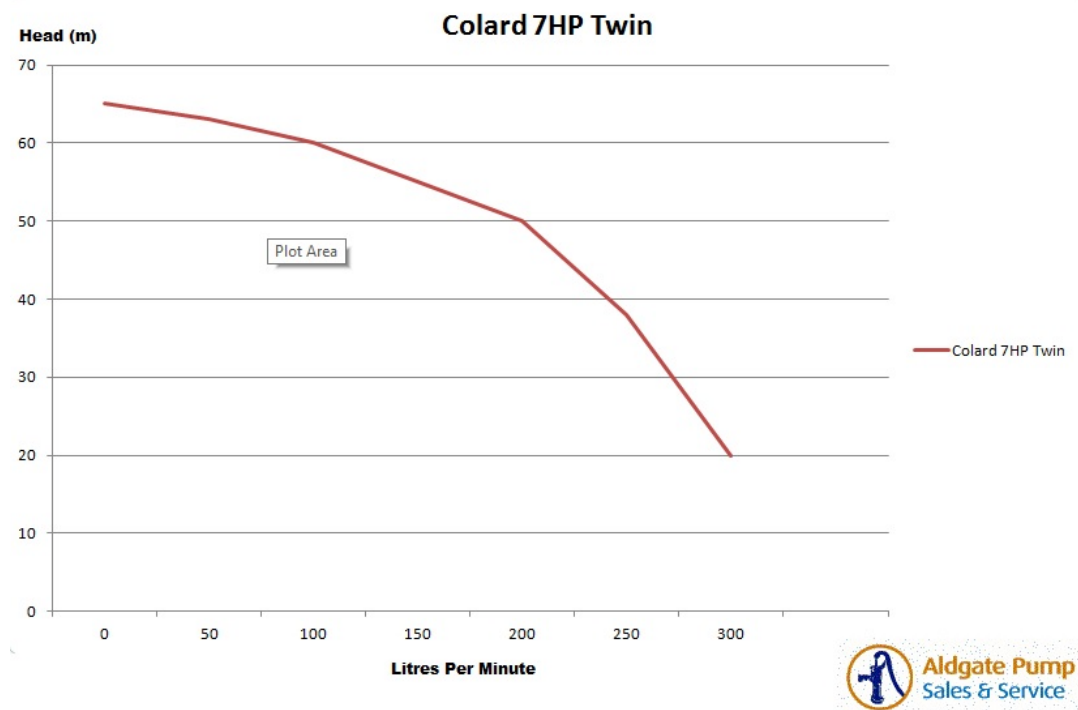

## Specifications

All Colard Diesel models are speed governed at approx 3100 RPM.

At this speed the pump will not overload the engine under a variety of pumping conditions unless exceeding water flow rates.

The Diesel engine is made in China and imported to Australia where it is re-branded.

10HP Colard Pumpset & Roll frame overall dimensions :  
Length 650mm, Width 490mm, Height 725mm

Model	Colard 10 HP (Diesel Engine only)
Type	Single-Cylinder, Vertical 4-Cycle, Air-cooled Diesel
Combustion System	Direct Injection
Displacement [cc(cu.in.)]	418 (25.51)
Bore x Stroke [mm (in.)]	86×72 (3.39×2.83)
Rated Speed [rpm]	Governed (3100)
Power Take Off	Crankshaft
Starting System	Recoil or Recoil/Electric
Fuel Tank Capacity	12 Litres (Long Range Tank)
Lub. Oil Capacity	1.65 Litres
Fuel Consumption (approx)	280 - 305 grams/KWh = 2.417 Litres per hour
Dimension: L x W x H [mm(in.)]	417(16.42) x 470(18.50) x 494(19.45)
Dry Weight(Recoil) [kg(lbs.)]	48 Kg (106)
Dry Weight(Electric) [kg(lbs.)]	53 Kg (117)

E: Electric Starter

